





F16 2

416

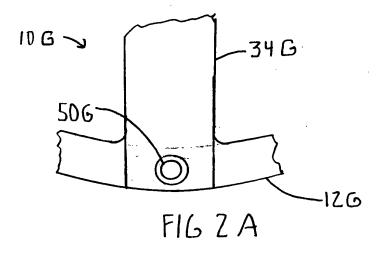

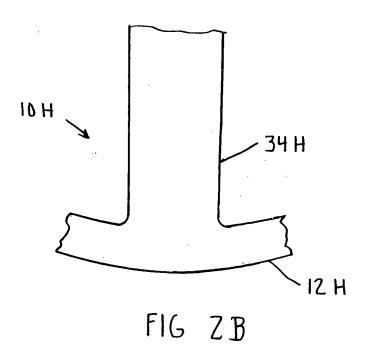


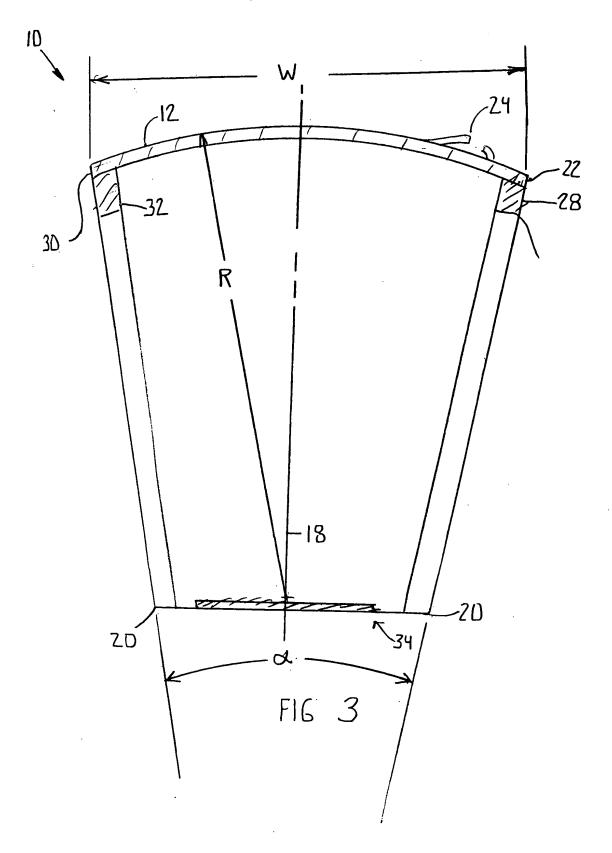


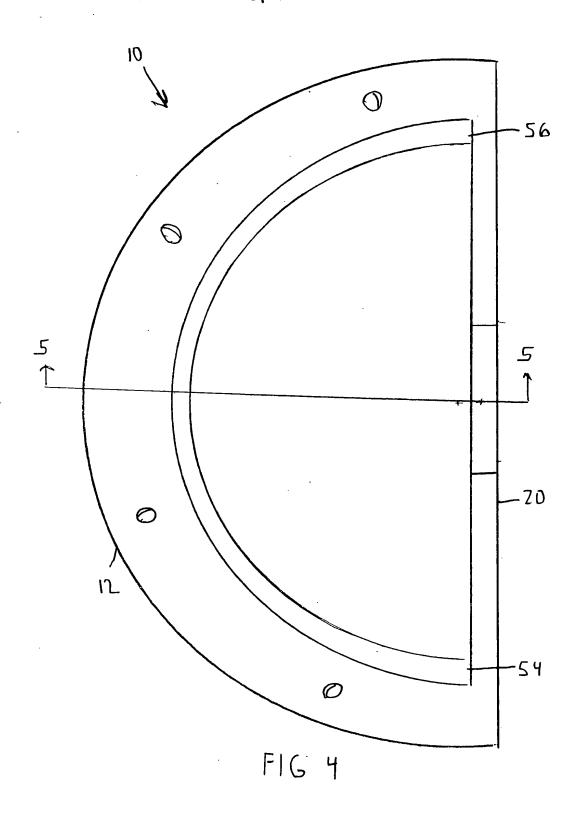



TITLE: ACETABULAR INSTRUMENT AND ASSOCIATED METHOD INVENTOR(S): TONY A. CUTSHALL ET AL. APP #:


APP #:
ATTY: J. WAGLEY ·TEL: (574) 372-7332
DOCKET #: DEP5069 CUST. #27777

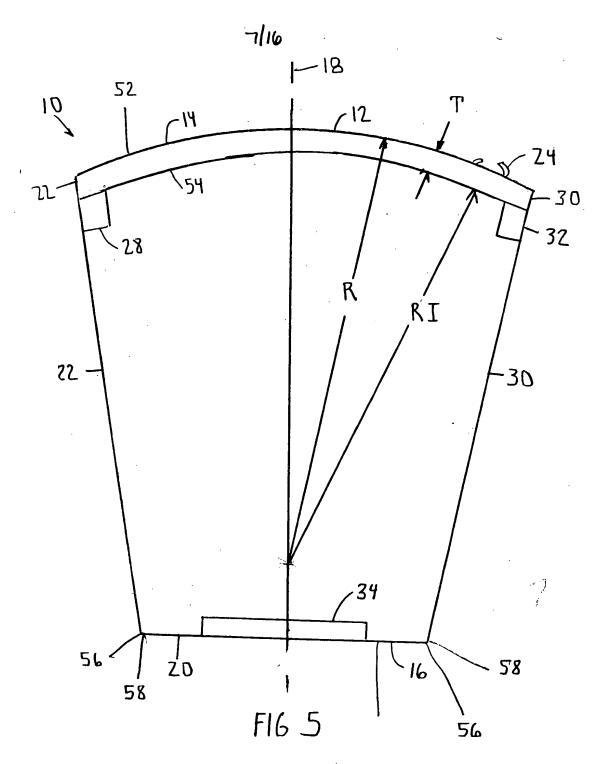

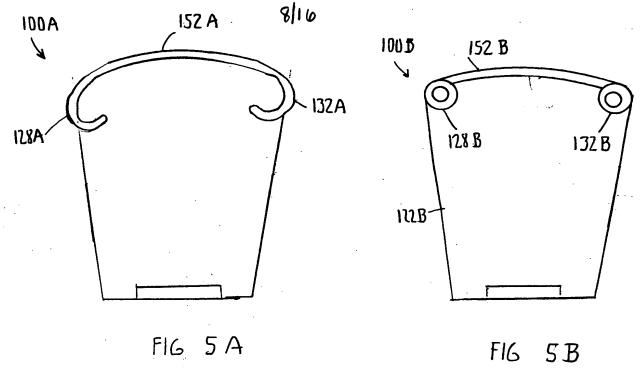







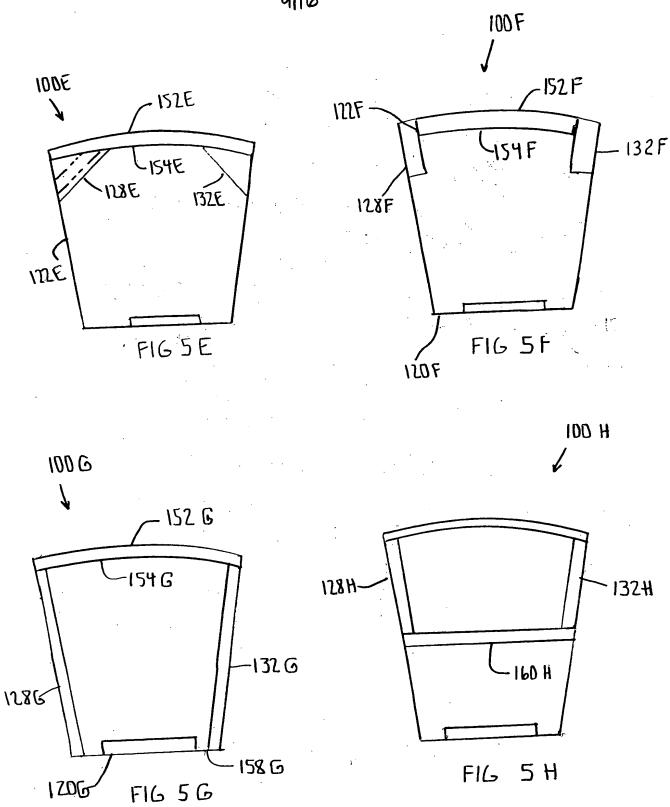


100 I 🗸



F16 5 I

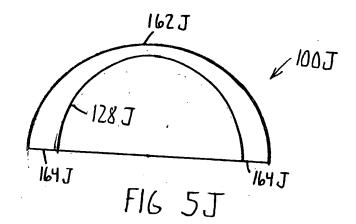








FIG 5L

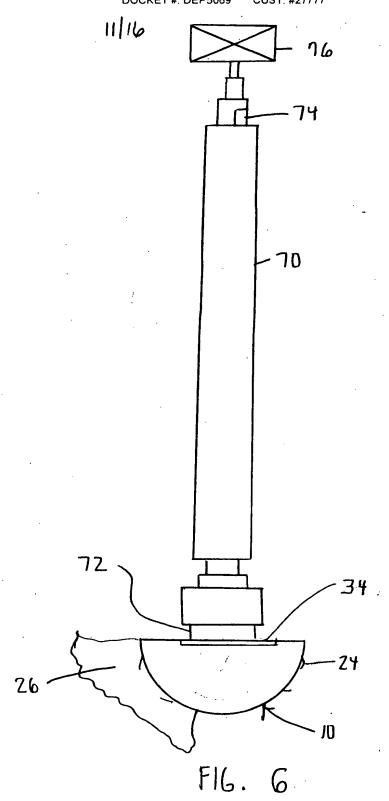

CLIST 1-12/16

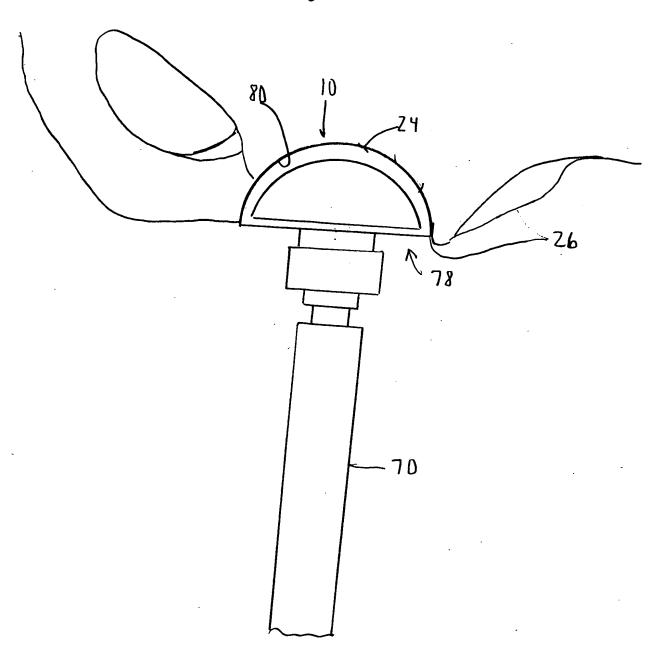

F16. 7


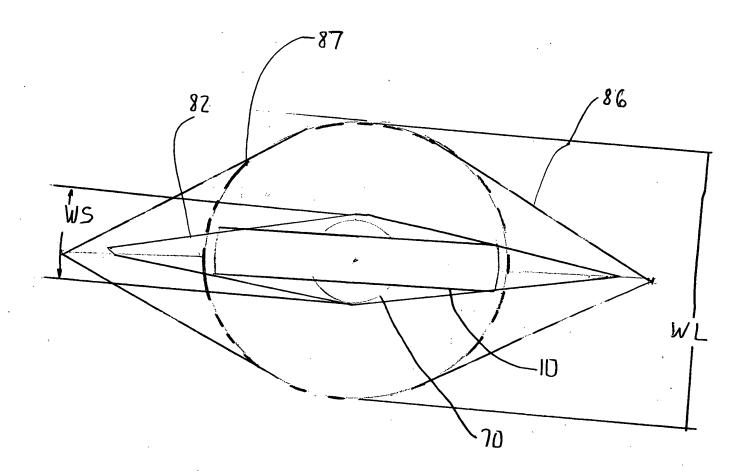


FIG. 8

TITLE: ACETABULAR INSTRUMENT AND ASSOCIATED METHOD INVENTOR(S): TONY A. CUTSHALL ET AL.

APP #: ATTY: J. WAGLEY TEL: (574) 372-7332 DOCKET #: DEP5069 CUST. #27777

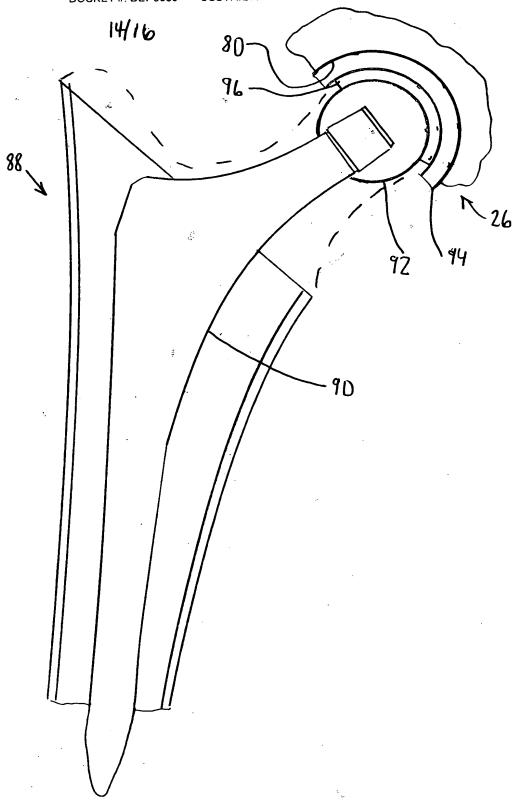


F16. 9

TITLE: ACETABULAR INSTRUMENT AND ASSOCIATED METHOD INVENTOR(S): TONY A. CUTSHALL ET AL.

200

APP #:
ATTY: J. WAGLEY TEL: (574) 372-7332
DOCKET #: DEP5069 CUST. #27777

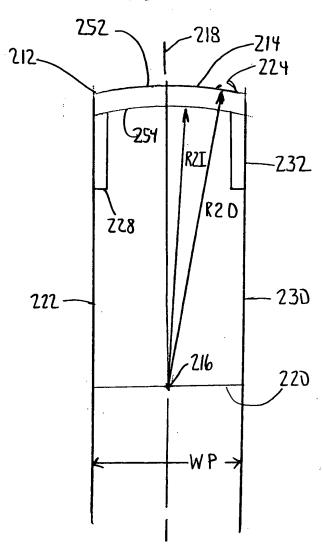


F16. 10

400

402

Providing a cutting tool including a body including a peripheral surface, the peripheral surface defined by a radius extending from an origin, the body defining an axis of rotation thereof, the body defining an end surface operably connected to peripheral surface and, the body defining a relief surface spaced from the axis of rotation and operably connected to peripheral surface, a cutter operably associated with said body for reaming a portion of the acetabulum, and a support structure secured to the relief surface.

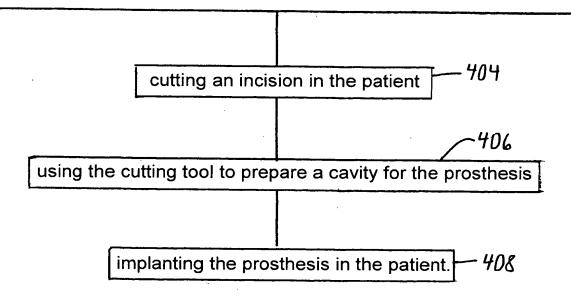

F16. 11